




Thermal Transfer Ribbon Technical Data Sheet

WX001 Premium Wax Resin Enhanced

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed diam nonummy nibh euismod tincidunt ut laoreet dolore magna aliquam erat volutpat. Ut wisi enim ad minim veniam, quis nostrud exerci tation ullamcorper suscipit lobortis nisl ut aliquip ex ea commodo consequat. Duis

Ribbon Properties

Base Film	Toray PET film
Base Film Thickness	4.5um + 0.1um
Color	Black
Ink Melting Point	70C (158 F)
Print Speed	4-8 IPS

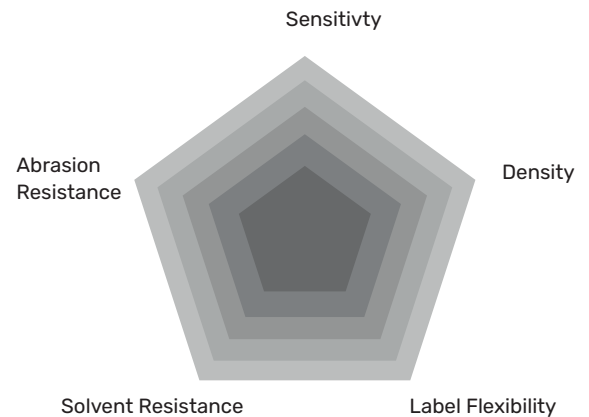

Recommended Substrates

- Coated and uncoated paper tag & label stocks
- Synthetic papers

Benefits

- Easy to use, no printer adjustments needed
- Sharp text and lines form highly readable normal and rotated barcodes
- Dark images with solid fill and no show-through
- Good durability

Recommended Application

